
Hi-Style

High-performance recessed luminaires

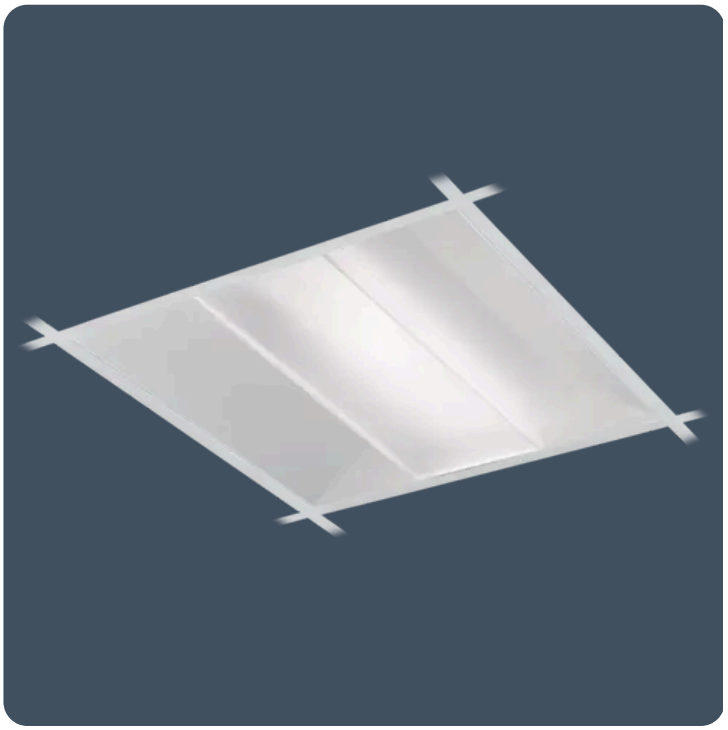

The clean, modern Hi-Style recessed luminaire is a popular choice for a wide range of applications.

Hi-Style is available in a range of wattages, in both 600 x 600 mm and 1200 x 600 mm versions, achieving efficiencies up to 150.0 LL/CW. Hi-Style is available in either opal or low-glare optic versions, both of which achieve full EN 12464-1/LG7 compliance and provide excellent wall and vertical illumination.

The polycarbonate flame-retardant TP(a) rated diffuser is designed to IP40 to exclude dust, dirt, and flies.

Applications: offices, healthcare, meeting rooms, call centres, school classrooms, libraries, control rooms, reception areas, lobbies, retail, and circulation areas.

- Low glare optics for EN12464-1 / LG7 (<3000cd/m² @ 65°) or opal diffuser option
- Excellent wall and vertical illumination
- Balanced direct/indirect luminance control above 65°
- Suitable for most ceiling types; lay-in or pull up with optional side arm suspensions accessible from below
- Extruded side diffusers give vibrant yet low glare aesthetics
- Designed to exclude dust, dirt and flies
- SmartScan wireless technology removes the need for control cabling. Ideal for retro-fit

Notes: 500 x 500 mm and air-handling versions available to special order

IP40 (IP20 above ceiling) **Up to 150.4 LL/CW** SMARTSCAN LUXGUARD **TM66 circularity score 2.7**

Specification

Mounting	**Recessed**	IP rating	**IP40 (IP20 above ceiling)**
Nominal size	**600 x 600 mm** **1200 x 600 mm**	Max presence detection height	**8 m**

Sustainability

TM66 circularity score	**2.7**

Lighting

Optic	**Low glare diffuser Opal diffuser**	Lumen output	**2,560 lm - 9,495 lm**
Efficacy	**Up to 150.4 LL/CW**		

Emergency data

Emergency lumen output	**380 lm - 560 lm**	Emergency type	**Maintained**
Emergency duration	**3 hours**	Battery specification	**Lithium Iron Phosphate (LiFePO4)**

Power

LED power	**16 W - 60 W**	Circuit power	**19 W - 67 W**

Construction

Housing	**Zinc coated steel body**	Finish	**Full polyester powder coat**
Body colour	**Satin white (RAL9016)**	Optical assembly	**Polycarbonate TP(a) fire-retardant diffuser**


LED characteristics

CRI	**80+**	Colour temperature	**4000 K**
Rated life (hours)	**100 K - L90/B10**	LED protection	**LUX Guard**
Driver efficiency	**>86%**	Replaceable light source	**Yes**
Power factor	**>0.9**	MacAdam ellipse	**3 Step**
Flicker metric	**IEC TR 61547-1: PstLM ≤1.0 / SVM ≤0.4**		

Compliance

UKCA	**Yes**	CE	**Yes**
C-Tick (Aus)	**Yes**	Thermoplastic rating	**TP(a)**

Dimensions

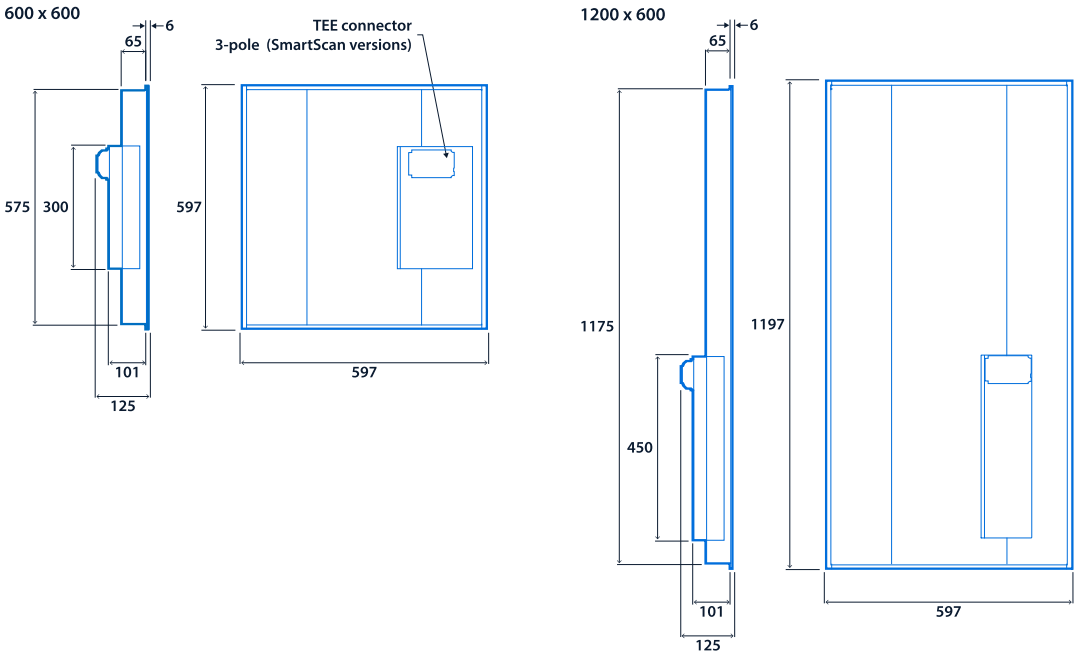
600 x 600
6
65
TEE connector
3-pole (SmartScan versions)
575
300
597
101
125
597
1200 x 600
6
65
1175
450
1197
101
125
597

Hi-Style

Range

Emergency system (optional)	Product	LED power	Nominal size	Optic	Lighting control system
W SmartScan Emergency*	**HI** Hi-Style	**16** 16 W **24** 24 W **29** 29 W **34** 34 W	**M** 600 x 600 mm	**O** Opal **L** Low Glare	**S** SmartScan Internal **A** Dimming (DALI) **L** Non-dimming
		36 36 W **48** 48 W **60** 60 W	**L** 1200 x 600 mm		

* **Only** available with **S / L** control type

E.g. **WHI16MOS** = SmartScan Emergency / Hi-Style / 16 W / 600 x 600 mm / Opal / SmartScan Internal

Accessories

Product code	Description	Weight
HI20250	Side arm suspension kit - 4 arms per kit - Not required for lay-in mounting	-



Click or scan here

View Hi-Style variants using our online filtering tool



Information is correct as of 16 Nov 2026, however must not be interpreted as a guarantee of individual product performance and/or characteristics. We reserve the right to alter specifications and designs without prior notice.