

Voltage free Interface to allow selected group or global commands to be transmitted to SmartScan luminaires

The Interface allows control of SmartScan installations using volt-free inputs. The Interface can be used to control individual switching groups or multiple groups on a SmartScan mesh network.

- Allows control of SmartScan installations using volt-free inputs e.g. switching all SmartScan lighting to permanent ON, overriding automatic control if the fire alarm switches into alarm state
- Can be used to control individual switching groups or multiple groups on a SmartScan mesh network
- LED indicator shows the current configuration of the lighting (if a latching input is used)
- Can initiate testing of emergency luminaires
- Can be operated with latching or momentary close inputs
- 24 inputs providing 10 group commands, 3 ColourActive group commands and 11 global commands
- Programmable using the SmartScan Programmer



IP56

SMARTSCAN


Specification

IP rating IP56

Compliance

UKCA	Yes	CE	Yes
C-Tick (Aus)	Yes		


Dimensions

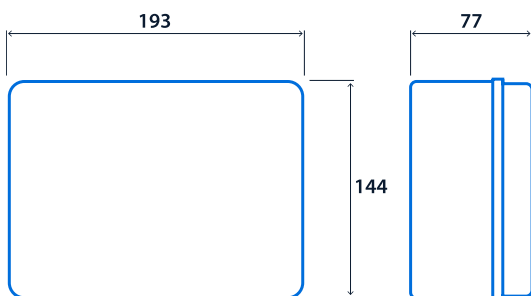

SmartScan Interface



Click or scan here
View SmartScan Interface
variants using our online
filtering tool



Information is correct as of 17 Feb 2025, however must not be interpreted as a guarantee of individual product performance and/or characteristics. We reserve the right to alter specifications and designs without prior notice.